

Network Working Group

Internet Draft  
Expires in six Months

D. Schremp  
J. Black  
J. Weiss  
Magnalink  
1 March 1994

**PPP Magnalink Variable Resource Compression  
draft-ietf-pppext-magnalink-00.txt**

Status of this Memo

This document is the product of the Point-to-Point Protocol Working Group of the Internet Engineering Task Force (IETF). Comments should be submitted to the [ietf-ppp@ucdavis.edu](mailto:ietf-ppp@ucdavis.edu) mailing list.

Distribution of this memo is unlimited.

This document is an Internet Draft. Internet Drafts are working documents of the Internet Engineering Task Force (IETF), its Areas, and its Working Groups. Note that other groups may also distribute working documents as Internet Drafts.

Internet Drafts are draft documents valid for a maximum of six months. Internet Drafts may be updated, replaced, or obsoleted by other documents at any time. It is not appropriate to use Internet Drafts as reference material or to cite them other than as a ``working draft'' or ``work in progress.''

Please check the [lid-abstracts.txt](#) listing contained in the internet-drafts Shadow Directories on [nic.ddn.mil](http://nic.ddn.mil), [nsc.nsf.net](http://nsc.nsf.net), [nic.nordu.net](http://nic.nordu.net), [ftp.nisc.sri.com](http://ftp.nisc.sri.com), or [munnari.oz.au](http://munnari.oz.au) to learn the current status of any Internet Draft.

Abstract

The Point-to-Point Protocol (PPP) [[1](#)] provides a standard method of encapsulating multiple protocol datagrams over point-to-point links. The PPP Compression Control Protocol [[2](#)] provides a method for negotiating data compression over PPP links.

The Magnalink Variable Resource Compression Algorithm (MVRCA) allows a wide range of interoperable compression implementations whose performance characteristics are a function of available CPU and memory resources.

## Introduction

The Magnalink variable resource compression algorithm defines a family of interoperable compression solutions with compression performance as a function of available CPU and memory resources. It addresses the need for an algorithm which can be tailored to the system on which it is implemented without compromising interoperability.

## Licensing

Source licenses are available on a non-discriminatory basis.

The contact person for evaluation under NDA and Licensing is:

Director of OEM Sales  
Magnalink Communications Division  
Telco Systems Inc.  
63 Nahatan Street  
Norwood, Mass. 02062  
Phone: (617) 255-9400, Fax: (617) 255-5885  
oem@magna.telco.com

## MVRCA Packets

Before any MVRCA packets may be communicated, PPP must reach the Network-Layer Protocol phase[1], and the Compression Control Protocol must reach the Opened state.

The text of a Packet to be compressed begins with PPP Protocol number. The Packet header including the PPP Protocol number may have already been compressed when Protocol-Field-Compression has been negotiated.

## Reliability and Sequencing

MVRCA packets may be sent across an unreliable link or may use a reliable link as described in "PPP Reliable Transmission"[3] if the reliable link has been negotiated. If frames are delivered out of order or a frame is dropped, the decompressor will detect this and requests a resynchronization using the Reset-Req and Reset-Ack types of the CCP[2], with the compressor for the affected context.

## Data Expansion


Schremp, Black & Weiss expires in six months

[Page 2]

Although the compression algorithm may occasionally expand a data packet, there is no expansion in MVRCA since any expanded data is instead sent uncompressed. Dictionary synchronization is maintained across uncompressed packets.

Encapsulation

The encapsulation consists of the PPP Protocol Identifier, a bit to indicate if the data is compressed, the Context Identifier(CID), a proprietary flag bit (E), a Packet Integrity Byte(PIB), and the Compressed data.

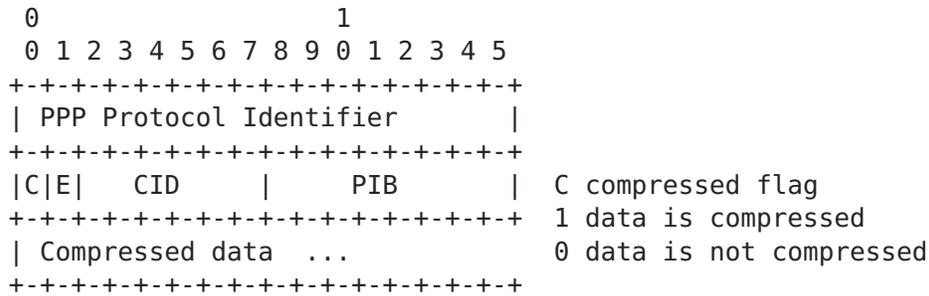

Compressed/Uncompressed Flag (C)

When attempting to compress certain types of Packets or Fragments the compressor may not be effective. When this occurs the uncompressed data is added to the compression History Buffer and sent across the link in frame with the Compressed/Uncompressed Flag(C) set to 0.

Context Identifier (CID)

Since PPP will transport multiple protocol datagrams it may be advantageous to compress each protocol or each virtual circuit in a different History Buffer or Context. The CID allows the compressor to indicate to the decompressor which History Buffer the compressor decided to use for a given Packet. The basis of this decision is up to the implementor. The number of buffers and size of each buffer is negotiated.

A CID of 0 indicates that the Packet by Packet context will be used if it has been negotiated. The Packet by Packet context is cleared between Packets so that this History Buffer is not maintained across Packet boundaries.

Schremp, Black & Weiss expires in six months

[Page 3]



Context History field. Values are 1-63. This value includes both the Packet by Packet context and the number of contexts for which history is maintained. Therefore, when this value is 1 and the P (Packet by Packet) flag is also 1, then only in packet compression is supported and history context is not retained across packet boundaries. The Context Identifier (CID) starts with 1 for contexts where the history is maintained.

P - Packet by Packet flag

When 1, packet by packet compression is enabled for the context whose context ID is 0. When P is 0, packet by packet compression is not supported.

#### Security Considerations

Security issues are not discussed in this memo.

#### References

- [1] Simpson, W., Editor; "The Point-to-Point Protocol (PPP)", [RFC1548](#), December 1993.
- [2] Rand, D. "The PPP Compression Control Protocol(CCP)", work in progress, [draft-ietf-pppext-compression-03.txt](#).
- [3] Rand, D. "PPP Reliable Transmission", work in progress, [draft-ietf-pppext-reliable-00.txt](#).

#### Acknowledgments

#### Chair's Address

The working group can be contacted via the current chair:

Fred Baker  
Advanced Computer Communications  
315 Bollay Drive  
Santa Barbara, California 93117

(805) 685 4455

EMail: fbaker@acc.com

Author's Address

Comments about this document may also be directed to the authors.

Doug Schremp  
Jeffrey Black  
Jeffrey Weiss

Telco Systems, Inc.  
Magnalink Communications Division  
63 Nahatan Street  
Norwood Ma. 02062

(617) 255-9400

E-mail: dhs@magna.telco.com  
jtb@magna.telco.com  
jaw@magna.telco.com